


Versatile use, finishing of boreholes.



- Especially for high-strength steels and cast irons
- Post-drill deburring
- Tough
- Comfort and precision
  
- 90° milling angle
- Weldon shank
- High-speed steel
- Head with 3 cutting edges

**Machine**

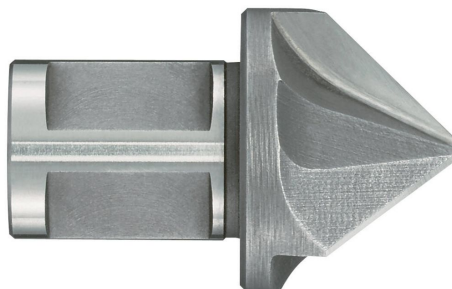

**Application**



K- Ferrous Cast iron with Short Chips  
P1- Unrealized steels  
P2- Weakly allied steels

**Features**



**Properties and benefits**

- + 90° milling angle : For 90° chamfering operation. ↻ For making 90° chamfering to down screw and/or rivet heads.
- + Weldon shank: cylindrical shank with 3/4" flats. ↻ Particularly suited for the attachment of tools to drills with a magnetic base.
- + High-speed steel: HSS substrate ↻ For general use in steels and cast irons up to 950 N/mm<sup>2</sup>
- + Head with 3 cutting edges: tool geometry designed with 3 cutting edges. ↻ Enables the excellent distribution of the cutting force and a neat surface condition.

| Code        | EAN           | Name   | L  | QTY | PCB |
|-------------|---------------|--|----|-----|-----|
| 10370312500 | 3221910825782 | HSS 90° Weldon deburring cutter (Hanging tube) Ø: 25 / Øint: / L: 43 | 43 | 1   | 1   |
| 10370313000 | 3221910825799 | HSS 90° Weldon deburring cutter (Hanging tube) Ø: 30 / Øint: / L: 47 | 47 | 1   | 1   |
| 10370314000 | 3221910825805 | HSS 90° Weldon deburring cutter (Hanging tube) Ø: 40 / Øint: / L: 52 | 52 | 1   | 1   |
| 10370315500 | 3221910825812 | HSS 90° Weldon deburring cutter (Hanging tube) Ø: 55 / Øint: / L: 63 | 63 | 1   | 1   |