

High-performance drill bit for incredibly fast and intensive drilling of high-strength steels, thanks to its geometry and its TiAlN coating.



- Especially for fine high-strength steel sheets
- Maximum long life
- Incredibly fast drilling
- Optimal chip removal
- Anti-rotation attachment


- Automatic centring
- Tri-flat shank
- High-speed steel
- TiAlN coating

Ø 4 to 12 - 4 to 20 - 6 to 37 mm Plastic Case


**Machine**



**Application**

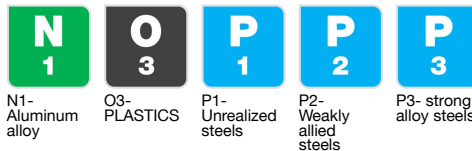

**Features**



**Properties and benefits**

- + Split-point grinding:reduction of the drill tip. ➡ Enables the simple self-centring of the drill bit on the smoothest of surfaces. Significantly reduces the required axial load.
- + Tri-flat shank: cylindrical shank with 3x 120° flats, for 3-piece drill chucks. ➡ Enables maximum torque transmission Prevents the rotation of the bit in the chuck. Specially adapted for through-holes.
- + High-speed steel: HSS substrate ➡ For general use in steels and cast irons up to 950 N/mm<sup>2</sup>
- + TiAlN coating: TiAlN base, thickness 2/4µm, hardness 3000HV, coefficient of friction 0.4, heat resistance 900°C. ➡ Thermal shield. Allows you to increase service life, cutting speed, and progress. Reduces the axial load. Versatile uses.

**Données de gestion :**

PCB : 1 / Kilogram. : 0,372 / Dimensions : 0130x0075x0075 mm / EAN : 3221910780517