

1146854 | HSS-E5 metal drill bit (5% cobalt) - Split point - SLR graduated **TECHNIC** (Plastic sleeve)

High-performance drill bit for the drilling of steels, stainless steels, and cast irons. Graduated drill bit for controlling the depth while drilling. Made in France.




- Especially for stainless steel and high-strength steels
- Incredibly fast drilling
- Tough
- Comfort and precision
- Made in France
- Tri-flat shank
- 35° type N flute
- 5% cobalt HSS
- 135° tip
- SLR laser graduation



Machine



Application

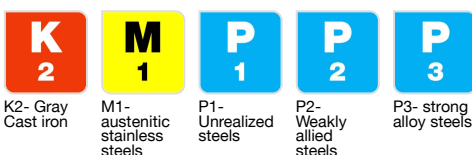

Features



Properties and benefits

- + Tri-flat shank: cylindrical shank with 3x 120° flats, for 3-piece drill chucks. ➡ Enables maximum torque transmission Prevents the rotation of the bit in the chuck. Specially adapted for through-holes.
- + 35° type N flute: normal flute profile with a 35° helix angle. ➡ Suitable for strong and difficult materials. Enables finer edge sharpness, for reduced cutting effort.
- + 5% cobalt high-speed steel: HSS substrate enriched with 5% cobalt. Improved heat retention (strength, cutting sharpness) ➡ For general use in metals up to 1200 N/mm².
- + 135° tip: 135° tip angle for the sharpening of the drill bit. ➡ Suitable for strong and difficult materials. Enables a shorter and stronger cutting edge, thus prolonging the service life.
- + SLR laser graduation: laser graduation on the cutting part of the drill bit. ➡ Laser graduation allows you to control your drilling depth while the bit is rotating.



Code	EAN	Ø	d2/CM	L	l	lu	QTY	PCB
11468540100	3221912030054	1	1	34	12		1	3
11468540150	3221912030061	1.5	1.5	40	18		1	3
11468540200	3221912030085	2	2	49	24		1	3
11468540250	3221912030092	2.5	2.5	57	30		1	3
11468540300	3221912030047	3	3	61	33		1	3
11468540320	3221912030160	3.2	3.2	65	36		1	3
11468540350	3221912030177	3.5	3.5	70	39		1	3
11468540400	3221912030184	4	4	75	43		1	3
11468540420	3221912030191	4.2	4.2	75	43		1	3

High-performance drill bit for the drilling of steels, stainless steels, and cast irons. Graduated drill bit for controlling the depth while drilling. Made in France.

11468540450	3221912030207	4.5	4.5	80	47	1	3
11468540500	3221912030214	5	5	86	52	1	3
11468540520	3221912030221	5.2	5.2	86	52	1	3
11468540550	3221912030238	5.5	5.5	93	57	1	3
11468540600	3221912030245	6	6	93	57	1	3
11468540650	3221912030252	6.5	6.5	101	63	1	3
11468540700	3221912030269	7	7	109	69	1	1
11468540750	3221912030276	7.5	7.5	109	69	1	1
11468540800	3221912030283	8	8	117	75	1	1
11468540850	3221912030290	8.5	8.5	117	75	1	1
11468540900	3221912030306	9	9	125	81	1	1
11468540950	3221912030313	9.5	9.5	125	81	1	1
11468541000	3221912030320	10	10	133	87	1	1
11468541050	3221912030337	10.5	10.5	133	87	1	1
11468541100	3221912030344	11	11	142	94	1	1
11468541200	3221912030351	12	12	151	101	1	1
11468541300	3221912030368	13	13	151	101	1	1