

# 960MV51 | Multi-application machine tap HSSE-PM -HC PLUS coated -M -DIN 371/376 -C Shape -6HX

High performance tap (sintered steel), multi-application. HC PLUS coating increases tool life and reduces the coefficient of friction.




- Especially for multiple applications
- Versatile use

- Spiral flute
- HC PLUS coating

### Machine



### Application

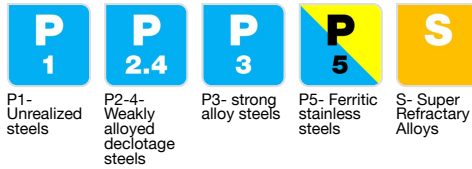

### Features



### Properties and benefits

- + Spiral flute : A flute shape that allows chips to be evacuated through the entrance to the hole. ➡ Allows better heat resistance due to better chip evacuation. For blind holes.
- + HC PLUS coating : Hardness 3000HV, coefficient of friction 0,15-0,20, resistance to heat (800°C). ➡ Low friction coefficient. Excellent chip evacuation. Increased tool life.



Code	EAN	Thread	Ø	Pitch	Norm	Drill	L	I	I4	I5	QTY	PCB
960MV5100300050	3221912267054	M 3	3	0.5	DIN 371	2,50	56	5	2-3	2,70	1	1
960MV5100400070	3221912267061	M 4	4	0.7	DIN 371	3,30	63	7	2-3	3,40	1	1
960MV5100500080	3221912267078	M 5	5	0.8	DIN 371	4,20	70	9	2-3	4,90	1	1
960MV5100600100	3221912267085	M 6	6	1	DIN 371	5,00	80	10	2-3	4,90	1	1
960MV5100800125	3221912253194	M 8	8	1.25	DIN 371	6,75	90	12	2-3	6,20	1	1
960MV5101000150	3221912267115	M 10	10	1.5	DIN 371	8,50	100	14	2-3	8,00	1	1
960MV5101200175	3221912267122	M 12	12	1.75	DIN 376	10,25	110	16	2-3	7,00	1	1
960MV5101400200	3221912267092	M 14	14	2	DIN 376	12,00	110	18	2-3	9,00	1	1
960MV5101600200	3221912267108	M 16	16	2	DIN 376	14,00	110	22	2-3	9,00	1	1