

960SRG1 | Multi-application machine tap HSSE-PM -TiN 20 coated -M -DIN 371/376 -Thread-former -6GX -Grooved

"By deformation" tap (sintered steel) for steels, stainless steels and cast iron. TiN 20 coating gives it an increased service life and high resistance to abrasion.




- Especially for high-strength steels, stainless steels and cast irons
- Precise thread tapping
- TiN20 coating

Machine



Application

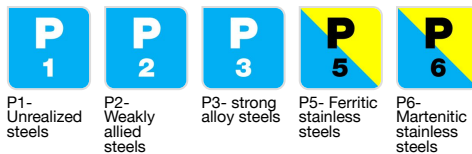

Features



Properties and benefits

- + TiN20 coating : Hardness 2300HV, coefficient of friction 0,60, resistance to heat (600°C). ↻ Very high abrasion resistance. Increased tool life.



| Code | EAN | Thread | Ø | Pitch | Norm | Drill | L | I | I4 | I5 | QTY | PCB |
|-----------------|---------------|--------|------|---------|-------|-------|----|-------|------|----|-----|-----|
| 960SRG100300050 | 3221912216823 | M 3 | 0.5 | DIN 371 | 2,80 | 56 | 10 | 2-2.5 | 2,70 | 1 | 1 | |
| 960SRG100400070 | 3221912216830 | M 4 | 0.7 | DIN 371 | 3,70 | 63 | 12 | 2-2.5 | 3,40 | 1 | 1 | |
| 960SRG100500080 | 3221912216847 | M 5 | 0.8 | DIN 371 | 4,65 | 70 | 12 | 2-2.5 | 4,90 | 1 | 1 | |
| 960SRG100600100 | 3221912216854 | M 6 | 1 | DIN 371 | 5,60 | 80 | 15 | 2-2.5 | 4,90 | 1 | 1 | |
| 960SRG100800125 | 3221912216861 | M 8 | 1.25 | DIN 371 | 7,40 | 90 | 18 | 2-2.5 | 6,20 | 1 | 1 | |
| 960SRG101000150 | 3221912216878 | M 10 | 1.5 | DIN 371 | 9,30 | 100 | 22 | 2-2.5 | 8,00 | 1 | 1 | |
| 960SRG101200175 | 3221912216885 | M 12 | 1.75 | DIN 376 | 11,20 | 110 | 22 | 2-2.5 | 7,00 | 1 | 1 | |