

Tool made of bi-metal HSS steel Ideal for routing pipes, ducts. Speed and precision thanks to the variable pitch teeth.




- Alternate top bevel
- HSS toothing
- Variable teeth



Machine



Application

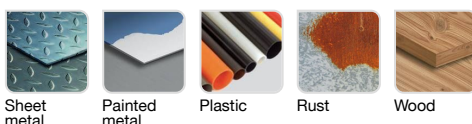

Features

BiM

Properties and benefits

- + Alternating teeth: teeth spaces alternating from left to right. ➡ Facilitates the cutting and removal of particles and prevents the blockage of the saw during cutting.
- + Bi-metal steel blade: combination of progressive toothing made from quick-cutting tempered steel (HSS), and the body made from high-strength carbon steel (HCS). ➡ Very flexible, used when there is a risk that the attachment will break. Very high resistance to wear, for a longer service life.
- + Variable toothing: design whereby the teeth are positioned with irregular gaps (pitches) and with alternating small and large teeth with different gap sizes. ➡ Enables the cutting of a wide range of different materials. Reduces the risk of teeth breaking and reduces vibrations when cutting.

Code	EAN	Ø	Blade height	QTY	PCB
XT50522052200	3128820522001	19	38	1	1
XT50522052204	3128820522049	22	38	1	1
XT50522052206	3128820522063	25	38	1	1
XT50522052210	3128820522100	29	38	1	1
XT50522052214	3128820522148	32	38	1	1
XT50522052216	3128820522162	35	38	1	1
XT50522052220	3128820522209	40	38	1	1
XT50522052222	3128820522223	44	38	1	1
XT50522052224	3128820522247	51	38	1	1
XT505220030	3221912164339	53	38	1	1
XT50522052228	3128820522285	60	38	1	1
XT50522052230	3128820522308	65	38	1	1
XT50522052232	3128820522322	68	38	1	1
XT505220031	3221912164308	71	38	1	1
XT50522052234	3128820522346	73	38	1	1
XT50522052236	3128820522360	76	38	1	1
XT505220032	3221912164292	80	38	1	1
XT50522052238	3128820522384	83	38	1	1
XT505220033	3221912164254	86	38	1	1
XT50522052244	3128820522445	102	38	1	1
XT505220034	3221912164247	110	38	1	1
XT505220035	3221912164230	127	38	1	1