


Aplicación: aceros semi-duros 700 N/mm<sup>2</sup>




- Especial aceros y aluminios
- Comodidad y precisión
- Acero rápido

## Máquinas

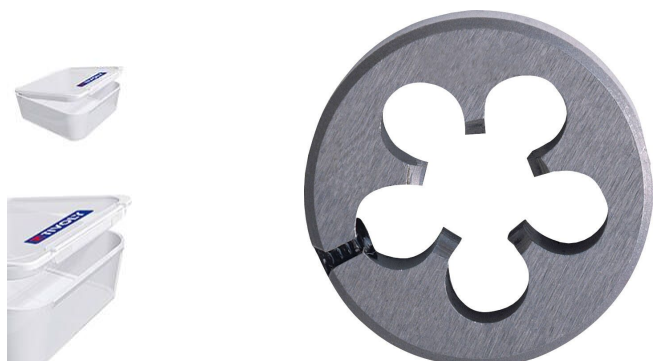

## Aplicaciones



## Características



## Propiedades y beneficios

- + Acero rápido: sustrato HSS ➡ Para uso general en aceros de baja dureza



| Codigo        | EAN           | Ø     | Paso | Jaula (Ø) | Jaula (H) | Cad | PCB |
|---------------|---------------|-------|------|-----------|-----------|-----|-----|
| 1100031020040 | 3221910552473 | M2    | 0,4  | 25.4      | 8         | 1   | 1   |
| 1100031025045 | 3221910552497 | M2,5  | 0,45 | 25.4      | 8         | 1   | 1   |
| 1100031030050 | 3221910552503 | M3    | 0,5  | 25.4      | 8         | 1   | 1   |
| 1100031040070 | 3221910552534 | M4    | 0,7  | 25.4      | 8         | 1   | 1   |
| 1100031050080 | 3221910552589 | M5    | 0,8  | 25.4      | 8         | 1   | 1   |
| 1100031060100 | 3221910552626 | M6    | 0,1  | 25.4      | 9         | 1   | 1   |
| 1100031070100 | 3221910552640 | M7    | 0,1  | 25.4      | 9         | 1   | 1   |
| 1100031080125 | 3221910552688 | M8    | 1,25 | 25.4      | 9         | 1   | 1   |
| 1100031090125 | 3221910552718 | M9    | 1,25 | 25.4      | 9         | 1   | 1   |
| 1100031100150 | 3221910552749 | M10   | 1,5  | 25.4      | 9         | 1   | 1   |
| 1100031120175 | 3221910552770 | M12   | 1,75 | 25.4      | 9         | 1   | 1   |
| 1100031030060 | 3221910552510 | MF3   | 0,6  | 25.4      | 8         | 1   | 1   |
| 1100031035060 | 3221910552527 | MF3,5 | 0,6  | 25.4      | 8         | 1   | 1   |
| 1100031040075 | 3221910552541 | MF4   | 0,75 | 25.4      | 8         | 1   | 1   |
| 1100031040080 | 3221910552558 | MF4   | 0,8  | 25.4      | 8         | 1   | 1   |
| 1100031045075 | 3221910552565 | MF4,5 | 0,75 | 25.4      | 8         | 1   | 1   |
| 1100031050075 | 3221910552572 | MF5   | 0,75 | 25.4      | 8         | 1   | 1   |
| 1100031050090 | 3221910552596 | MF5   | 0,9  | 25.4      | 8         | 1   | 1   |
| 1100031050100 | 3221910552602 | MF5   | 1    | 25.4      | 8         | 1   | 1   |
| 1100031060075 | 3221910552619 | MF6   | 0,75 | 25.4      | 9         | 1   | 1   |
| 1100031060125 | 3221910552633 | MF6   | 1,25 | 25.4      | 9         | 1   | 1   |
| 1100031080100 | 3221910552671 | MF8   | 1    | 25.4      | 9         | 1   | 1   |
| 1100031080150 | 3221910552695 | MF8   | 1,5  | 25.4      | 9         | 1   | 1   |
| 1100031100100 | 3221910552725 | MF10  | 1    | 25.4      | 9         | 1   | 1   |

Aplicación: aceros semi-duros 700 N/mm<sup>2</sup>

|               |               |      |      |      |   |   |   |
|---------------|---------------|------|------|------|---|---|---|
| 1100031100125 | 3221910552732 | MF10 | 1,25 | 25.4 | 9 | 1 | 1 |
|---------------|---------------|------|------|------|---|---|---|