


Aplicación: Aceros blandos hasta 500 N/mm<sup>2</sup>



■ Acero rápido

#### Máquinas

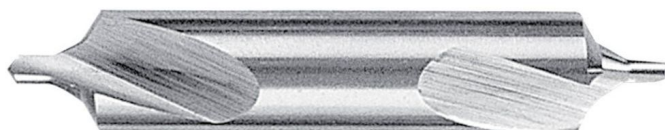

#### Aplicaciones



#### Características



#### Propiedades y beneficios

+ Acero rápido: sustrato HSS ➡ Para uso general en aceros de baja dureza



| Codigo        | EAN           | Ø    | d2/CM | L  | I   | lu | QTY | PCB |
|---------------|---------------|------|-------|----|-----|----|-----|-----|
| 8140821100040 | 3221910756109 | 1    | 4     | 25 | 0.8 |    | 1   | 1   |
| 8140821125050 | 3221910756130 | 1.25 | 5     | 25 | 1.1 |    | 1   | 1   |
| 8140821100060 | 3221910756116 | 1    | 6     | 25 | 0.9 |    | 1   | 1   |
| 8140821160063 | 3221910756161 | 1.6  | 6.3   | 35 | 1.3 |    | 1   | 1   |
| 8140821150080 | 3221910756147 | 1.5  | 8     | 31 | 1.3 |    | 1   | 1   |
| 8140821200080 | 3221910756178 | 2    | 8     | 31 | 1.6 |    | 1   | 1   |
| 8140821200100 | 3221910756185 | 2    | 10    | 40 | 2   |    | 1   | 1   |
| 8140821250100 | 3221910756192 | 2.5  | 10    | 35 | 2   |    | 1   | 1   |
| 8140821315112 | 3221910756239 | 3.15 | 11.2  | 45 | 3.1 |    | 1   | 1   |
| 8140821250120 | 3221910756208 | 2.5  | 12    | 40 | 2.5 |    | 1   | 1   |
| 8140821300140 | 3221910756222 | 3    | 14    | 45 | 2.5 |    | 1   | 1   |
| 8140821400140 | 3221910756246 | 4    | 14    | 50 | 3.1 |    | 1   | 1   |
| 8140821400180 | 3221910756253 | 4    | 18    | 50 | 3.9 |    | 1   | 1   |
| 8140821500180 | 3221910756260 | 5    | 18    | 55 | 3.9 |    | 1   | 1   |
| 8140821630200 | 3221910756284 | 6.3  | 20    | 50 | 3.9 |    | 1   | 1   |