


Foret à 60° pour centrer. Forme A.




■ Acier rapide

Machines



Applications

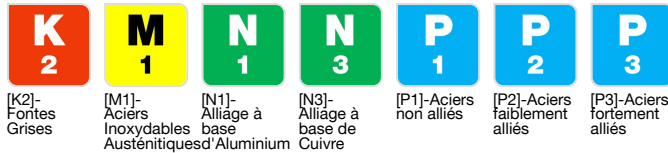

Caractéristiques



Propriétés et bénéfices

+ Acier rapide : Substrat HSS ➔ Pour les usages généraux dans l'acier jusqu'à 950 N/mm², les fontes et les aluminiums.



| Code | EAN | Ø | d2 | L | l | l.u | QTY | PCB |
|---------------|---------------|------|------|----|---|-----|-----|-----|
| 8140811050315 | 3221910479763 | 0.5 | 3.15 | 25 | | | 1 | 1 |
| 8140811063315 | 3221910479770 | 0.63 | 3.15 | 25 | | | 1 | 1 |
| 8140811080315 | 3221910479794 | 0.8 | 3.15 | 25 | | | 1 | 1 |
| 8140811100315 | 3221910479831 | 1 | 3.15 | 31 | | | 1 | 1 |
| 8140811125315 | 3221910479893 | 1.25 | 3.15 | 31 | | | 1 | 1 |
| 8140811100400 | 3221910479848 | 1 | 4 | 35 | | | 1 | 1 |
| 8140811160400 | 3221910479923 | 1.6 | 4 | 35 | | | 1 | 1 |
| 8140811150500 | 3221910479916 | 1.5 | 5 | 40 | | | 1 | 1 |
| 8140811200500 | 3221910479947 | 2 | 5 | 40 | | | 1 | 1 |
| 8140811200600 | 3221910479954 | 2 | 6 | 45 | | | 1 | 1 |
| 8140811250630 | 3221910479978 | 2.5 | 6.3 | 45 | | | 1 | 1 |
| 8140811250800 | 3221910480004 | 2.5 | 8 | 50 | | | 1 | 1 |
| 8140811300800 | 3221910480035 | 3 | 8 | 50 | | | 1 | 1 |
| 8140811315800 | 3221910480042 | 3.15 | 8 | 50 | | | 1 | 1 |
| 8140811300100 | 3221910480011 | 3 | 10 | 55 | | | 1 | 1 |
| 8140811400100 | 3221910480059 | 4 | 10 | 55 | | | 1 | 1 |
| 8140811400120 | 3221910480103 | 4 | 12 | 63 | | | 1 | 1 |
| 8140811500120 | 3221910480189 | 5 | 12 | 63 | | | 1 | 1 |
| 8140811500125 | 3221910480202 | 5 | 12.5 | 63 | | | 1 | 1 |
| 8140811500140 | 3221910480219 | 5 | 14 | 71 | | | 1 | 1 |
| 8140811630160 | 3221910480264 | 6.3 | 16 | 71 | | | 1 | 1 |
| 8140811600180 | 3221910480257 | 6 | 18 | 80 | | | 1 | 1 |
| 8140811800200 | 3221910480271 | 8 | 20 | 80 | | | 1 | 1 |