


Foret à 60° pour centrer. Forme A.




■ Acier rapide

Machines



Applications

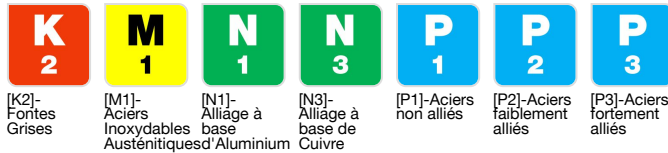

Caractéristiques



Propriétés et bénéfices

✚ Acier rapide : Substrat HSS ➡ Pour les usages généraux dans l'acier jusqu'à 950 N/mm², les fontes et les aluminiums.



Code	EAN	Ø	d2	L	l	l.u	QTY	PCB
8140811050315	3221910479763	0.5	3.15	25			1	1
8140811063315	3221910479770	0.63	3.15	25			1	1
8140811080315	3221910479794	0.8	3.15	25			1	1
8140811100315	3221910479831	1	3.15	31			1	1
8140811125315	3221910479893	1.25	3.15	31			1	1
8140811100400	3221910479848	1	4	35			1	1
8140811160400	3221910479923	1.6	4	35			1	1
8140811150500	3221910479916	1.5	5	40			1	1
8140811200500	3221910479947	2	5	40			1	1
8140811200600	3221910479954	2	6	45			1	1
8140811250630	3221910479978	2.5	6.3	45			1	1
8140811250800	3221910480004	2.5	8	50			1	1
8140811300800	3221910480035	3	8	50			1	1
8140811315800	3221910480042	3.15	8	50			1	1
8140811300100	3221910480011	3	10	55			1	1
8140811400100	3221910480059	4	10	55			1	1
8140811400120	3221910480103	4	12	63			1	1
8140811500120	3221910480189	5	12	63			1	1
8140811500125	3221910480202	5	12.5	63			1	1
8140811500140	3221910480219	5	14	71			1	1
8140811630160	3221910480264	6.3	16	71			1	1
8140811600180	3221910480257	6	18	80			1	1
8140811800200	3221910480271	8	20	80			1	1