



Foret à 60°-120° pour centrer. Forme B.

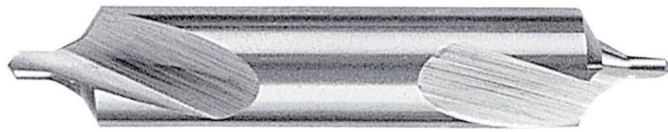

■ Acier rapide

**Machines**



**Applications**



**Caractéristiques**



**Propriétés et bénéfices**

+ Acier rapide : Substrat HSS ➔ Pour les usages généraux dans l'acier jusqu'à 950 N/mm<sup>2</sup>, les fontes et les aluminiums.



Code	EAN	Ø	d2	L	l	l.u	QTY	PCB
8140821100040	3221910756109	1	4	25	0.8		1	1
8140821125050	3221910756130	1.25	5	25	1.1		1	1
8140821100060	3221910756116	1	6	25	0.9		1	1
8140821160063	3221910756161	1.6	6.3	35	1.3		1	1
8140821150080	3221910756147	1.5	8	31	1.3		1	1
8140821200080	3221910756178	2	8	31	1.6		1	1
8140821200100	3221910756185	2	10	40	2		1	1
8140821250100	3221910756192	2.5	10	35	2		1	1
8140821315112	3221910756239	3.15	11.2	45	3.1		1	1
8140821250120	3221910756208	2.5	12	40	2.5		1	1
8140821300140	3221910756222	3	14	45	2.5		1	1
8140821400140	3221910756246	4	14	50	3.1		1	1
8140821400180	3221910756253	4	18	50	3.9		1	1
8140821500180	3221910756260	5	18	55	3.9		1	1
8140821630200	3221910756284	6.3	20	50	3.9		1	1